

MINING

Cable bolts

TYPE KL 18 AND KL 18 K

DESCRIPTION

Cable bolts are made from cable of Ø18 mm and 1+6 structure in accordance with PN-71/M-80236 standard. The following types of bolt can be distinguished:

- Cable KL 18 (Plain cable)
- Cable KL 18 K (Bird cage cable bolt)

The cable lay of KL 18 K bolt was modified to form birdcage like bulbs of 100mm in length and 26 ÷ 28 mm in diameter. This ensures a better force distribution affecting the cement grout around the cable. When filled with grout the cages act like stiff bulbs in relation to the cement face.

APPLICATION AND USE

Cable bolts KL 18 and KL 18 K are designed to be used to reinforce ground and rock near mining excavations and in particular near workings in weak strata with lower strength or entering mining pressure zones.

ADVANTAGES

- Fast bolting using the barrel and wedge system
- Possibility of applying a technical solution for pre-tensioning
- Ability to use various types of plates in the anchor sets



TECHNICAL DATA


DESIGN DATA

The bulbs remain non-cracked despite considerable forces affecting the cable as radial forces occurring in the wires, which could potentially crush the cement in the bulbs, are relatively light when compared to axial forces.

The shape of the cable considerably affects force distribution around the cable caused by cable displacement in the rock.

The bulbs cause considerable forces perpendicular to the hole wall compressing the grout and at the same time reduce compressive forces parallel to the hole axis.

Force distribution around cable bulb

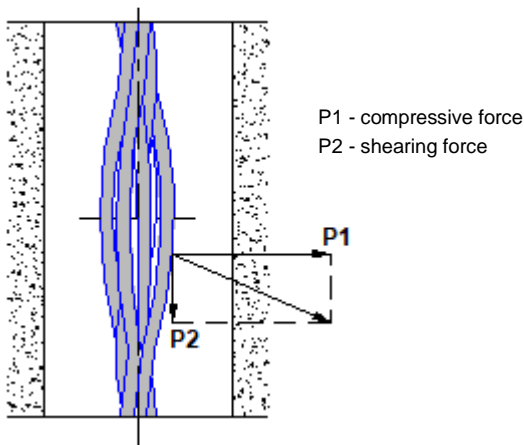

As a result, cage cables bolts perform better in the rock, i.e. cable movement in the rock, caused by load intensity, is smaller when compared to plain cable.

MECHANICAL PROPERTIES

Cable bolts should have the following mechanical properties:

- Rm = min 1420 MPa
- Rm = min 1620 MPa
- Rm = min 1800 Mpa

Approval tests have shown that cement grout hardening is 3 times stronger for KL 18 K cage cable bolts than plain cable bolts, while the bolt length stays the same.

BOLT DATA

Details	Value
Cable diameter	18 mm
Cage diameter	26 ÷ 28 mm
Cage distance	200, 300, 400, 500, etc (recommended distance 500 mm)
Bolt length	1 ÷ 15 m
Capacity required by regulations	min 150 kN
Useful load	320 kN

Square washers, round profiled or flat washers are made of 10 or 12 mm metal plate, and come in sizes from 150 to 300 mm.

If elements of mining equipment need to be attached, use washer plates with a side hole or an eyelet.

Three-part clamping ring along with the bearing washer make the roof set.

M33 tensioning sleeve and M33 nut are used to apply the initial tension to the bolt.

APPLICATION METHOD

- Drill the hole of appropriate length and $\varnothing > 28$ mm for plain cable or $\varnothing > 38$ mm for cage cable bolts.
- Prepare the cable to be installed (attach a vent pipe of $\varnothing 6$ or $\varnothing 8$ mm to the cable).
- Insert the cable into the hole letting 15 to 20 cm of the cable out of the hole.
- Mount and fix the injection head.
- Prepare cement and water grout in the mixer.
- Inject the grout until cement wash appears in the vent tube or the air stops flowing out.
- After 24 hours fix the bearing washer, M33 sleeve and nut (if included) and the clamp.
- If the bolt comes with M33 tensioning sleeve and M33 nut, the initial tension of at least 30kN should be applied using a torque wrench with the torque of at least 60 Nm.

Installation procedure may differ when adhesives or other equipment is used to install the bolt.

PACKAGING AND TRANSPORTATION

Bolts can be tied in 10 pcs benches and additionally packaged in bundles of 10 benches.

The plates are stapled in 10 pcs sets with wire and stacked on pallets.

The other elements are packed in containers.

Based on an agreement between the supplier and the recipient, an individual method of packaging is allowed.

- UNITED KINGDOM: Minova Weldgrip Ltd.; Minova International Ltd.
- APAC: Minova Australia Pty Ltd.
- AMERICAS: Minova USA Inc.

CUSTOMER SERVICE

For additional support options available at your area, contact our local offices.

www.minovaglobal.com

DISCLAIMER

The Minova Logo is a registered trademark.

Copyright © 2019 Minova. All rights reserved.

All information contained in this document is provided for informational purposes only and is subject to change without notice. Since Minova cannot anticipate or control the conditions under which this information and its products may be used, each user should review the information in the specific context of the intended application. To the maximum extent permitted by law, Minova specifically disclaims all warranties expressed or implied in law, including accuracy, non-infringement, and implied warranties of merchantability or fitness for a particular purpose. Minova specifically disclaims, and will not be responsible for, any liability or damages resulting from the use or reliance upon the information in this document.

LIST OF REPRESENTATIVES

- AUSTRIA: Minova MAI GmbH
- CZECH REPUBLIC: Minova Bohemia s.r.o.
- FRANCE / BELGIUM: Sales office Minova France / Belgium
- GERMANY: Minova CarboTech GmbH
- ITALY: Minova CarboTech GmbH Italy branch
- KAZAKHSTAN: Minova Kazakhstan LLP
- POLAND: Minova Ekochem S.A.; Minova Arnall Sp. z o.o.; Minova Ksante Sp. z o.o.
- RUSSIA: ZAO "Carbo-ZAKK"
- SLOVAKIA: Minova Bohemia s. r. o., organizačná zložka
- SOUTH AFRICA: Minova Africa (Pty) Ltd.
- SPAIN: Minova Codiv S.L.U.
- SWEDEN / NORWAY: Minova Nordic AB